


Aquamaster Mini ★★ ★




Aquamaster Mini in situ

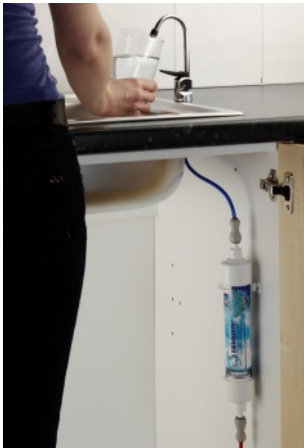

Refilling of Aquamaster Mini

Fitting Diagram

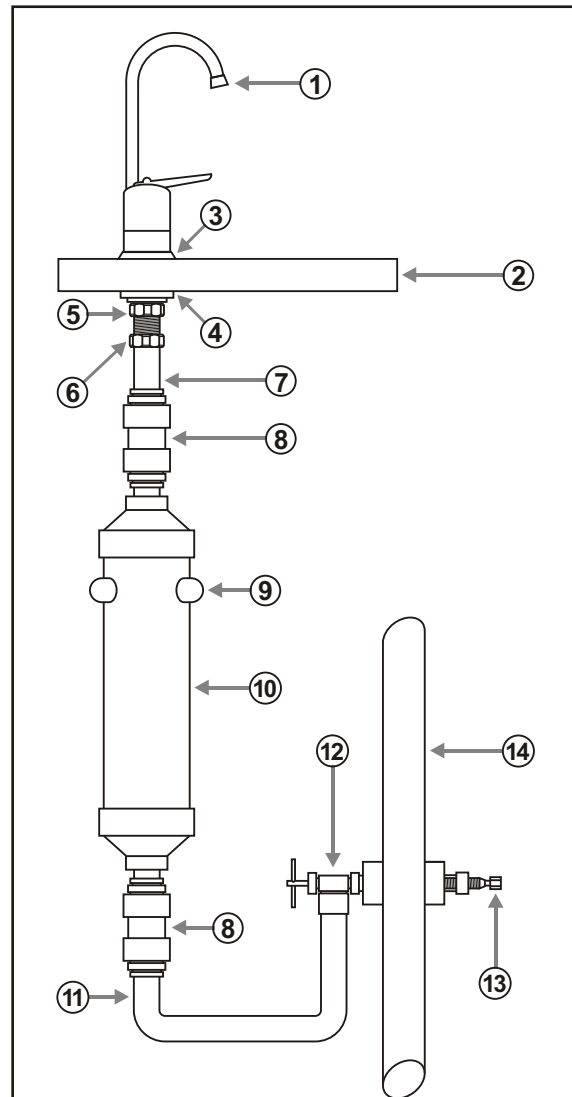

- | | |
|--|--|
| 1. Chrome tap. | 9. Mounting bracket. |
| 2. Working surface or sink top (not supplied). | 10. Filter unit. |
| 3. Black shoulder washer. | 11. Red tubing. |
| 4. Black locating washer. | 12. Self-tapping saddle valve. |
| 5. Lock washer nut. | 13. Lock nut. |
| 6. 1/4" compression nut. | 14. Cold water supply pipe (not supplied). |
| 7. Blue tubing. | |
| 8. Push fit pipe connector. | |

Fitting Instructions

1. Locate the chrome tap next to the edge of a sink ensuring that the end of the tap is over the sink. Drill a 1/2" hole in your chosen location. Install and secure tap ensuring that enough room exists below the tap to fit the pipe.
2. Using the screws provided, fix the bracket to the side wall or back of the cupboard. The filter should be mounted vertically.
3. Connect the blue piping to the tap. The tap parts should fit as follows (from top to bottom): tap, black shoulder washer, worktop/sink, black locating washer, lock washer nut, 1/4" tube insert, 6mm olive, 1/4" compression nut, blue tube.
4. Push each of the grey push fit connectors onto each end of the filter cartridge firmly.
5. Locate and tighten the self-tapping saddle valve onto the incoming mains supply. Turn clockwise to pierce the mains pipe but do not do this until the whole system is connected.
6. Cut both red and blue tubes to the correct length and push firmly into the inlet and outlet of the filter cartridge.
7. Open the chrome tap, then turn the self tapping saddle valve fully clockwise, then anti-clockwise to open. Low pressure at the chrome tap may mean that the saddle valve has not fully pierced the mains supply or it is not fully open, in this case, repeat the procedure.
8. Before use, flush at least 20 litres of water through. The water may be greyish at first but this is normal and harmless.

Refill Instructions

1. Turn off the self-tapping saddle valve on the mains water pipe by turning the handle clockwise. Check that the water supply is off by turning on the sink tap.
2. Pop the filter cartridge out of its mounting bracket and then remove each of the push fit connector ends by pressing down on the rings nearest to the filter.
3. Replace the old filter with a new one, pushing firmly into the push fit connectors and fitting it back onto the mounting bracket.